

Infrared Remote Control Receiver Module

IRM-H5XXM3/TR2 Series

Features

- High protection ability against EMI
- Circular lens for improved reception characteristics
- Available for various carrier frequencies
- Min burst length: 8 cycles
- Min gap length: 12 cycles
- Low operating voltage and low power consumption
- High immunity against ambient light
- High immunity against TFT and PDP backlight
- Long reception range
- High sensitivity
- Pb free and RoHS compliant



1 2 3

Descriptions

The device is miniature SMD type infrared receiver that has been developed and designed by utilizing the latest IC technology.

The PIN diode and preamplifier are assembled onto a lead frame and molded into an epoxy package which operates as an IR filter. The demodulated output signal can directly be decoded by a microprocessor


Pin Configuration

1. OUT
2. Vcc
3. GND

Applications


- AV equipment such as TV, VCR, DVD, CD, MD, etc.
- CATV set top boxes
- Multi-media Equipment
- Other devices using IR remote control

Application Circuit

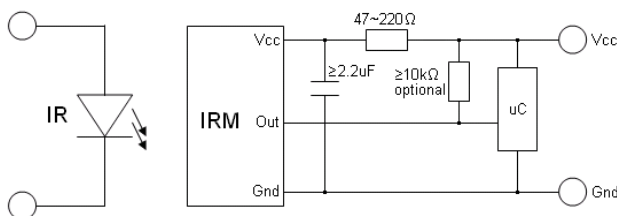

The RC Filter should be connected closely between Vcc pin and GND pin.

Block Diagram

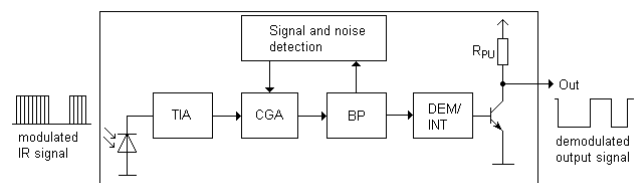

Infrared Remote Control Receiver Module


IRM-H5XXM3/TR2 Series

Parts Table


| Model No. | Carrier Frequency |
|----------------|-------------------|
| IRM-H536M3/TR2 | 36 kHz |
| IRM-H538M3/TR2 | 38 kHz |

Package Dimensions

(Dimensions in mm)

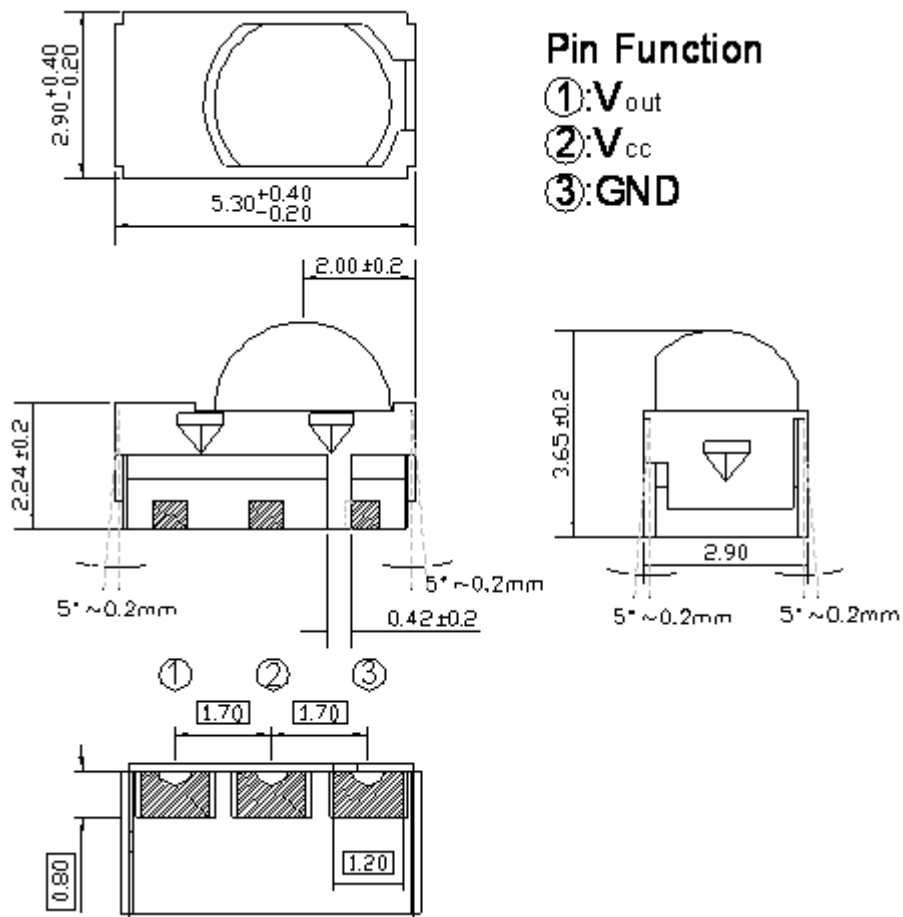

Recommended pad layout for surface mount leadform

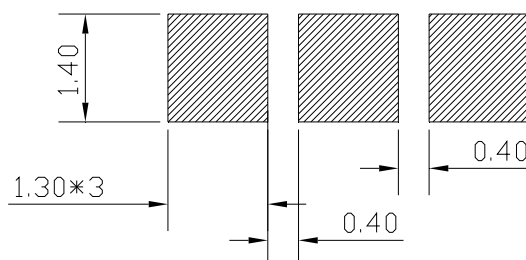

**Infrared Remote Control
Receiver Module****IRM-H5XXM3/TR2 Series****Absolute Maximum Ratings (T_a=25 °C)**

| Parameter | Symbol | Rating | Unit |
|-------------------------------------|------------------|-----------|------|
| Supply Voltage | V _s | 6 | V |
| Operating Temperature | T _{opr} | -20 ~ +80 | °C |
| Storage Temperature | T _{stg} | -40 ~ +85 | °C |
| Soldering Temperature ^{*1} | T _{sol} | 260 | °C |

^{*1} 4mm from mold body less than 10 seconds

Electro-Optical Characteristics (T_a=25°C and V_{cc}=3.0V)

| Parameter | Symbol | MIN. | TYP. | MAX. | Unit | Condition |
|---------------------------|-----------------|----------------------|------|------|------|---|
| Current Consumption | I _{cc} | - | 0.4 | 0.6 | mA | No signal input |
| Supply Voltage | V _s | 2.7 | - | 5.5 | V | |
| Peak Wavelength | λ _p | - | 940 | - | nm | |
| Reception Distance | L ₀ | 8 | - | - | m | See chapter ,Test method' |
| | L ₄₅ | 5 | - | - | | |
| Half Angle (Horizontal) | Θ _h | - | ±45 | - | deg | |
| Half Angle (Vertical) | Θ _v | - | ±45 | - | deg | |
| High Level Pulse Width | T _{WH} | 450 | - | 750 | μs | Test signal according to figure 1 |
| Low Level Pulse Width | T _{WL} | 450 | - | 750 | μs | |
| High Level Output Voltage | V _H | V _{cc} -0.4 | - | - | V | |
| Low Level Output Voltage | V _L | - | 0.2 | 0.5 | V | I _{SINK} ≤ 2mA |
| Internal pull up resistor | RPU | 34 | 40 | 46 | kΩ | |

Infrared Remote Control Receiver Module


IRM-H5XXM3/TR2 Series

Test Method

The specified electro-optical characteristic is satisfied under the following Conditions:

1. Measurement environment
A place without extreme light reflected
2. External light
Ordinary white fluorescent lamps (Light source temperature 2856°K, $E_e \leq 10\text{Lux}$) without high frequency modulation
3. Standard transmitter
The test transmitter is calibrated by using the circuit shown in figure 2. The radiation intensity of the transmitter is adjusted until **$V_o=400\text{mVp-p}$** . Both, the test transmitter and the photo diode, have a peak wavelength of 940nm. The photo diode for calibration is PD438B ($\lambda_p=940\text{nm}$, $V_r=5\text{V}$).
4. Measuring system According to the measuring system shown in Fig.-3

Fig.-1 Transmitter Wave Form

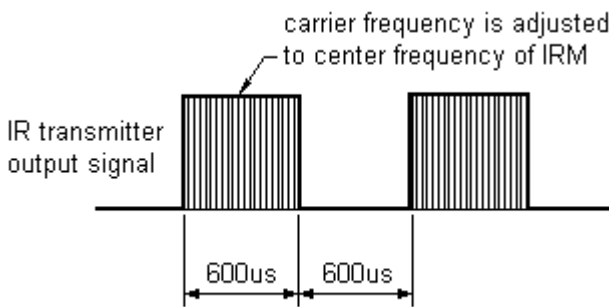

D.U.T output Pulse

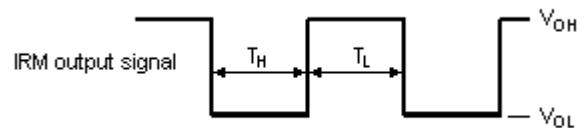


Fig.-2 Measuring Method


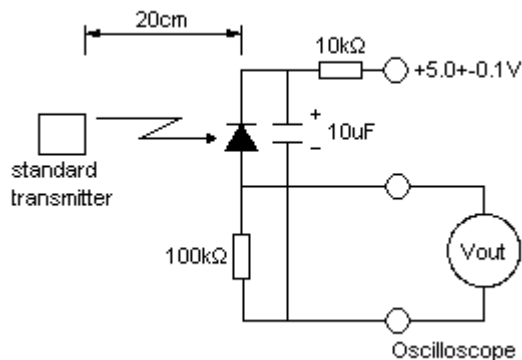


Fig.-3 Measuring System

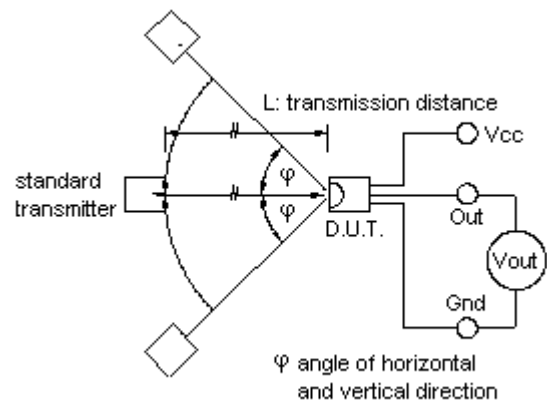

Infrared Remote Control Receiver Module

IRM-H5XXM3/TR2 Series

Typical Performance Curves

Fig.-4 Relative Responsibility vs. Wavelength

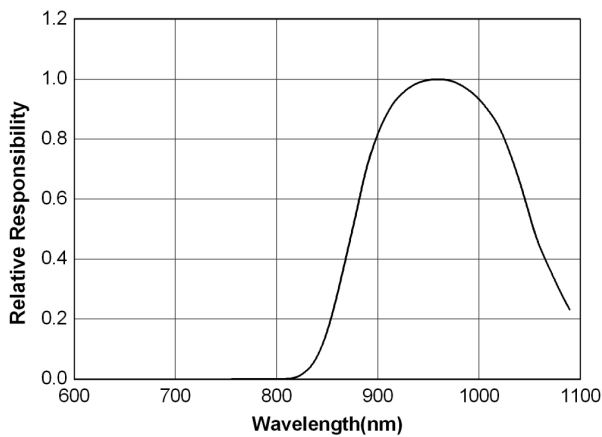


Fig.-5 Relative Sensitivity vs. Angle

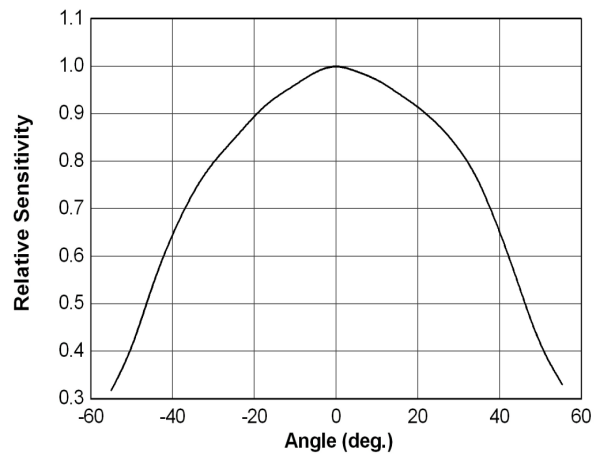


Fig.-6 Output Pulse Width vs. Transmission Distance

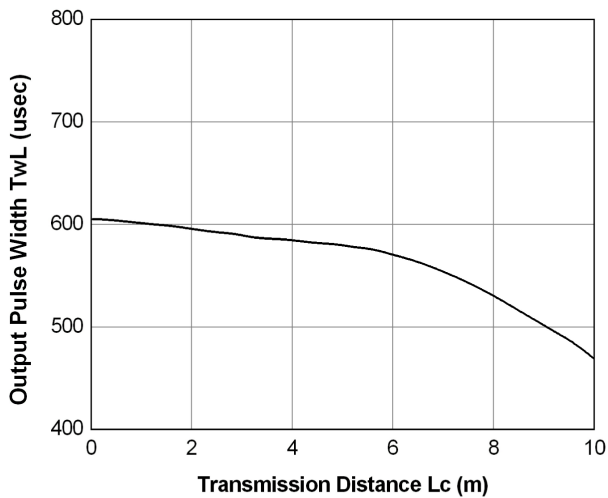


Fig.7 Relative Sensitivity vs. Supply Voltage


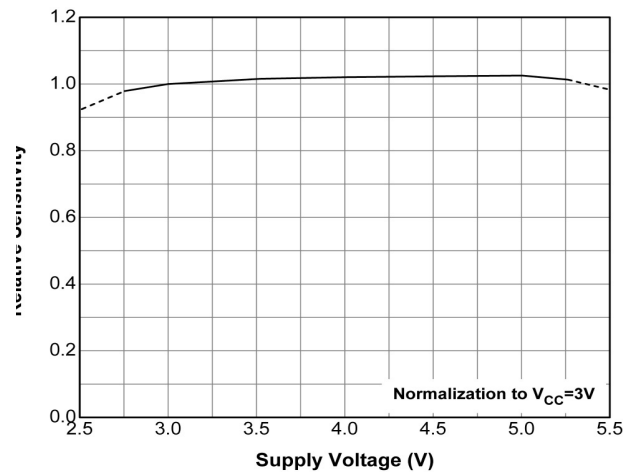


Fig.8 Relative Sensitivity vs. Carrier Frequency

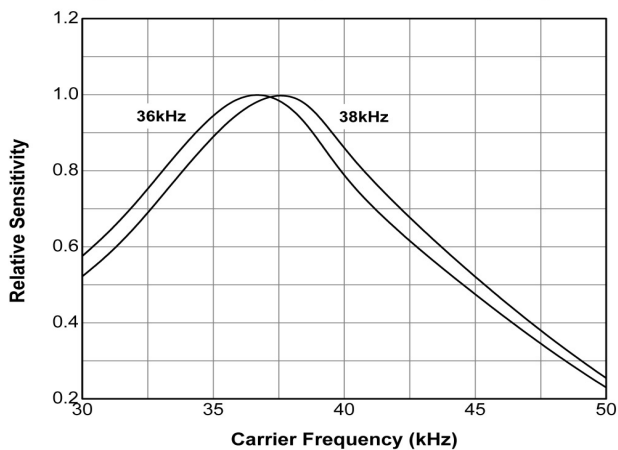

**Infrared Remote Control
Receiver Module****IRM-H5XXM3/TR2 Series**


Code information

| Protocol | Suitable | Protocol | Suitable |
|-----------------|-----------------|-----------------|-----------------|
| JVC | Yes | RCA | No |
| Matsushita | Yes | Sharp | Yes |
| Mitsubishi | No | Sony 12 Bit | Yes |
| NEC | Yes | Sony 15 Bit | No |
| RC5 | Yes | Sony 20 Bit | No |
| RC6 | Yes | Toshiba | Yes |
| RCMM | No | XMP-1 | Yes |
| RCS-80 | No | Continuous Code | No |

Infrared Remote Control Receiver Module

IRM-H5XXM3/TR2 Series

Tape & Reel Packing Specifications

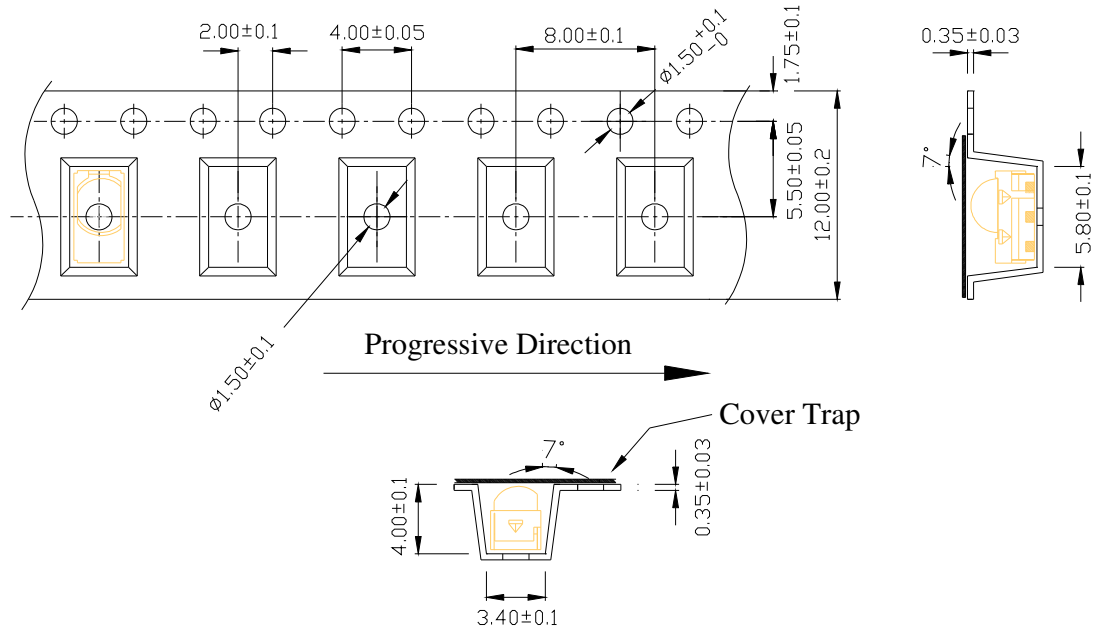

Packing Quantity



1000 pcs / Reel

5 Reels / Carton

Infrared Remote Control Receiver Module

IRM-H5XXM3/TR2 Series

Label format

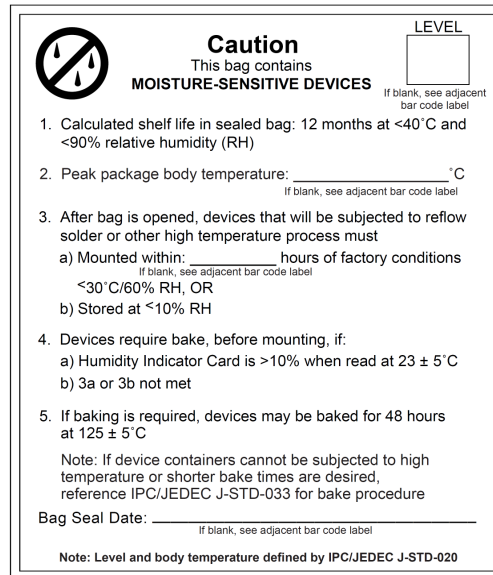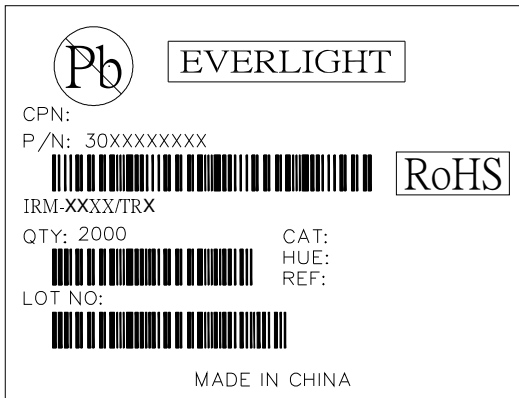

Moisture Classification-storage and used condition label

Recommended method of storage

The following are general recommendations for moisture sensitive level (MSL) 4 storage and use:

1. Shelf life in sealed bag from the bag seal date: 12 months at < 40 °C and < 90% relative humidity (RH)
2. After bag is opened, devices that will be subjected to reflow solder or other high temperature process must be mounted within 72 hours of factory conditions < 30 °C/60%RH.
3. If the moisture absorbent material (silica gel) has faded away or the IRM has exceeded the storage time. Baking treatment is required, refer to IPC/JEDEC J-STD-033 for bake procedure or recommend the conditions: 60±5°C for 96 hours.


ESD Precaution

Proper storage and handling procedures should be followed to prevent ESD damage to the devices especially when they are removed from the Anti-static bag. Electro-Static Sensitive Devices warning labels are on the packing.

Infrared Remote Control Receiver Module

IRM-H5XXM3/TR2 Series

Solder Reflow Temperature Profile

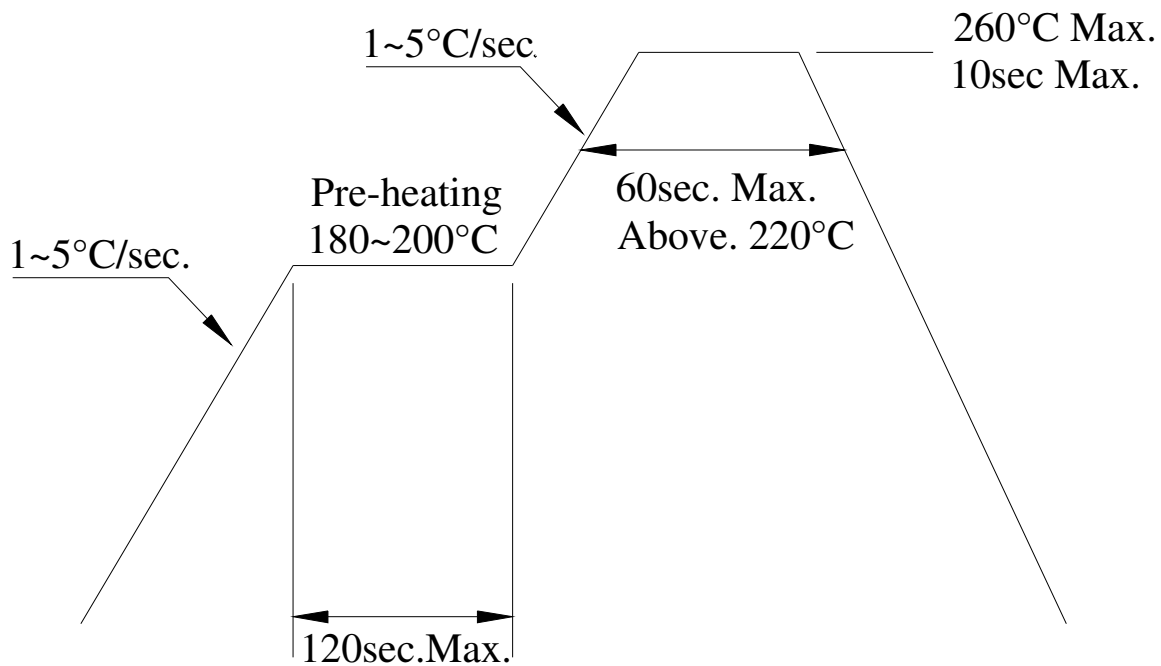

Note:

1. Reflow soldering should not be done more than two times.
2. When soldering, do not put stress on the IRM device during heating.
3. After soldering, do not warp the circuit board.

Infrared Remote Control Receiver Module

IRM-H5XXM3/TR2 Series

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.