



Infrared Receiver Control Receiver Module IRM-H8xxM3/TR2 series



Pin Configuration

1. GND
2. Vcc
3. Out
4. GND

Block Diagram

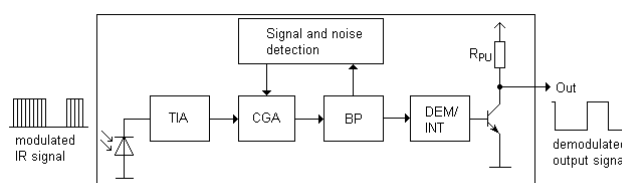

Features

- High protection ability against EMI
- Available for various carrier frequencies
- Min burst length: 8 cycles
- Min gap length: 12 cycles
- Low operating voltage and low power consumption
- High immunity against ambient light
- High immunity against TFT and PDP backlight
- Long reception range
- High sensitivity
- Pb free and RoHS compliant

Description


The device is miniature SMD type infrared receiver that has been developed and designed by utilizing the latest IC technology.

The PIN diode and preamplifier are assembled onto a lead frame and molded into an epoxy package which operated an IR filter. The demodulated output signal can directly be decoded by a microprocessor.

Applications

- Light detecting portion of remote control
- AV instruments such as Audio, TV, VCR, CD, MD, etc
- Home appliances such as Air-conditioner, Fan, etc
- Other devices using IR remote control
- CATV set top boxes
- Multi-media Equipment

Application Circuit

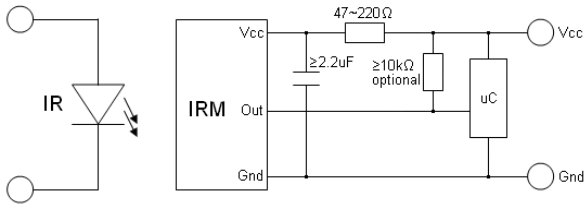

Parts Table

Model No.	Carrier Frequency
IRM-H836M3/TR2	36 kHz
IRM-H838M3/TR2	38 kHz
IRM-H856M3/TR2	56 KHz

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply Voltage	Vcc	6	V
Operating Temperature	Topr	-20 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +85	°C
Soldering Temperature ^{*1}	Tsol	260	°C

^{*1} 4mm from mold body for less than 5 seconds

Electro-Optical Characteristics (Ta=25°C)



Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Current consumption	I _{CC}	-	0.4	0.6	mA	No input signal
Supply voltage	V _{CC}	2.7	-	5.5	V	
Peak wavelength	λ _p	---	940	---	nm	
Reception range	L ₀	8	---	---	m	See chapter 'Test method'
	L ₄₅	5	---	---		
Half angle(horizontal)	φ _h	---	±45	---	deg	
Half angle(vertical)	φ _v	---	±45	---	deg	
High level pulse width	T _H	450	---	750	μs	Test signal according to figure 1
Low level pulse width	T _L	450	---	750	μs	
High level output voltage	V _{OH}	V _{CC} -0.4	---	---	V	I _{SOURCE} ≤ 1μ A
Low level output voltage	V _{OL}	---	0.2	0.5	V	I _{SINK} ≤ 2mA
Internal pull up resistor	R _{PU}	---	40	---	kΩ	

Test method

The specified electro-optical characteristics are valid under the following conditions.

1. Measurement environment
A place without extreme light reflections.
2. External light
The environment contains an ordinary, white fluorescent lamp without high frequency modulation. The color temperature is 2856K and the illumination at the IR receiver is less than 10 Lux ($E_v \leq 10\text{Lux}$).
3. Standard transmitter
The test transmitter is calibrated by using the circuit shown in figure 2. The radiation intensity of the transmitter is adjusted until $V_o=400\text{mVp-p}$. Both, the test transmitter and the photo diode, have a peak wavelength of 940nm. The photo diode for calibration is PD438B ($\lambda_p=940\text{nm}$, $V_r=5\text{V}$).
4. The measurement system is shown in Fig.-3

Fig.-1 Transmitter Wave Form

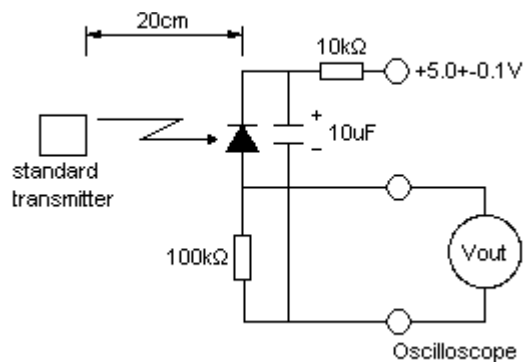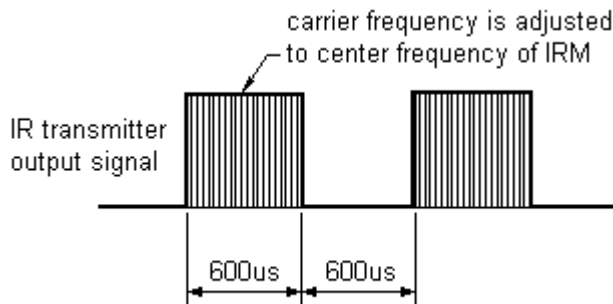

D.U.T output Pulse


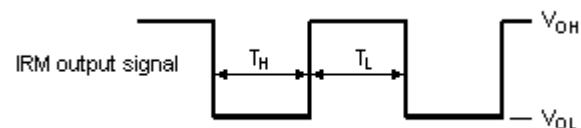


Fig.-3 Measuring System

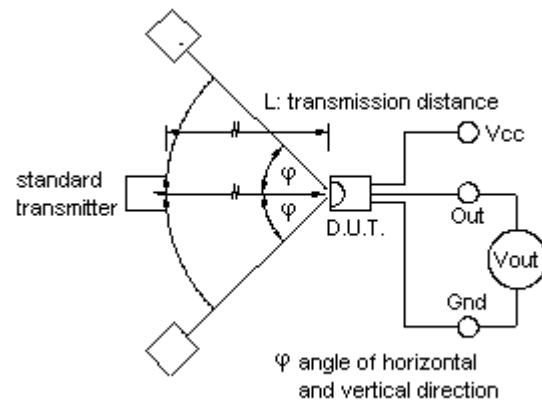

Typical Electro-Optical Characteristics Curves

Fig.4 Relative Responsibility vs. Wavelength

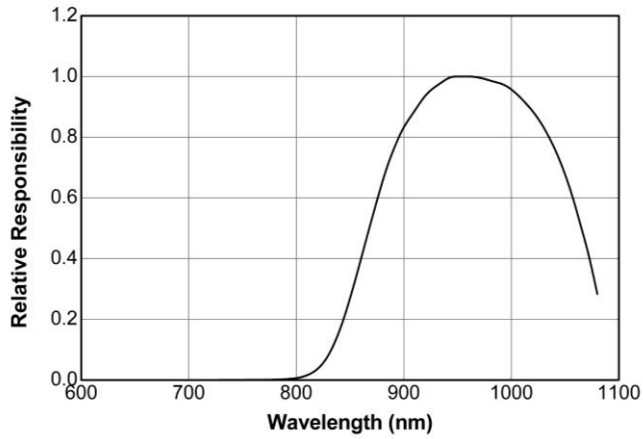


Fig.-5 Relative Sensitivity vs. Angle

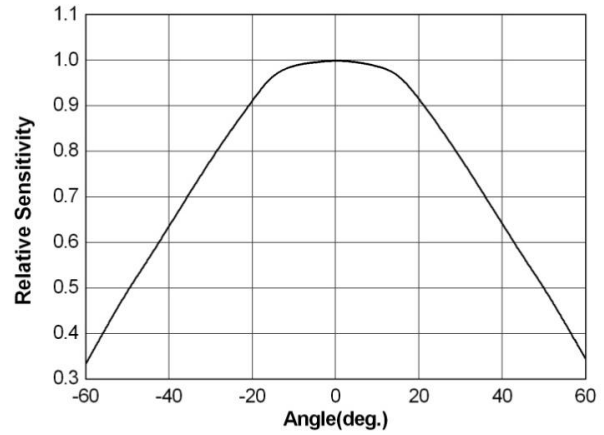


Fig.6 Variation Output Pulse Width vs. Distance

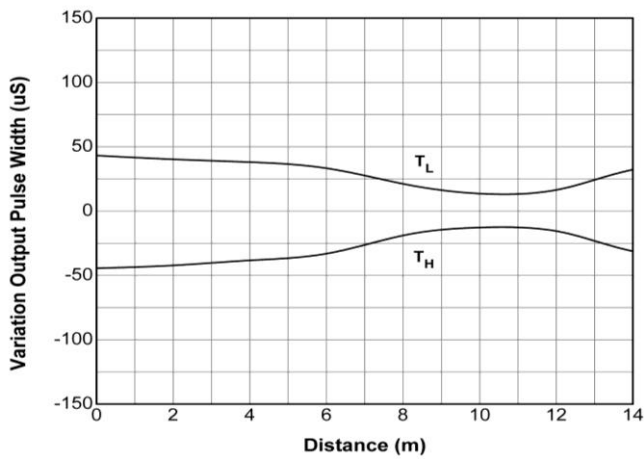


Fig.7 Relative Sensitivity vs. Supply Voltage


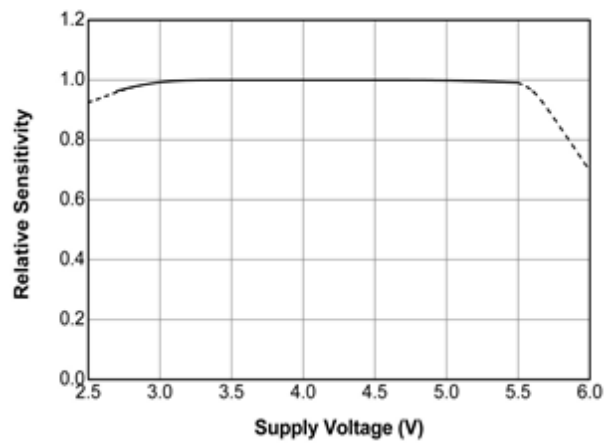


Fig.8 Relative Sensitivity vs. Carrier Frequency

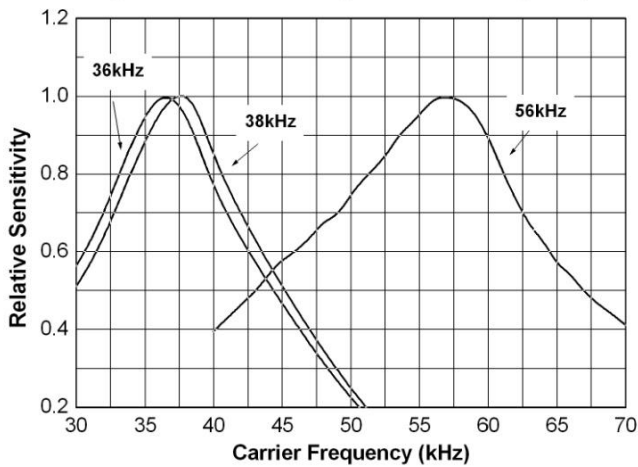

Technical drawing of a 2-position, 4-pole circuit breaker (Type 200) showing front, top, and side views with dimensions.


Front View (Top): Shows the main body with four mounting screws at the top.

Top View (Middle): Shows the top of the device with the following dimensions:

- Overall width: 6.60 ± 0.20
- Distance between center lines of the two poles: (3.40)
- Distance from the center line to the side edge: (0.65)
- Overall height: 3.00 ± 0.20
- Distance from the top edge to the center line: (1.80)
- Distance from the center line to the bottom edge: 1.27

Side View (Bottom): Shows the side profile with the following dimensions:


- Radius of the top arc: $R1.70$
- Overall height: 2.20 ± 0.20
- Four mounting feet at the bottom, numbered 1, 2, 3, and 4.

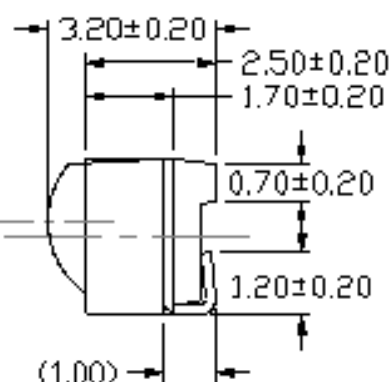

1. GND
2. Vcc
3. Out
4. GND

Tape & Reel Packing Specifications (Dimensions in mm)

Protocol	Suitable	Protocol	Suitable
JVC	Yes	RCS-80	NO
Matsushita	Yes	Sharp	Yes
Mitsubishi	NO	Sony 12 Bit	Yes
NEC	Yes	Sony 15 Bit	No
RC5	Yes	Sony 20 Bit	No
RC6	Yes	Toshiba	Yes
RCMM	NO	Zenith	Yes
RCA	NO	Panasonic	Yes
Continuous Code	NO	R-step	Yes
XMP-1	Yes		

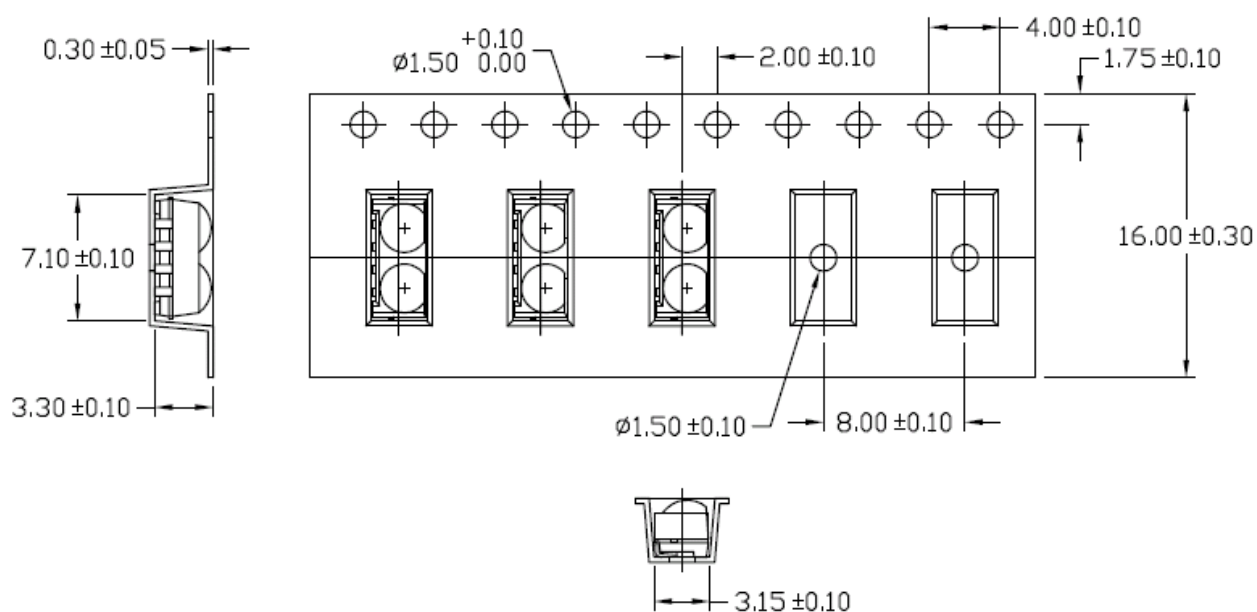

Packing Quantity

1000 pcs / Reel
5 Reels / Carton

Application Restrictions

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.